

Palm Collar Cable Kit Installation Instructions

Items: 3A-EKPC 680, 3A-EKPC880


Tools Required:

Better Bilt Drive Rod in corresponding size (sold separately)


Heavy hammer and adjustable wrench (or equivalent)

Installation Note:


A pre-drilled 2" pilot hole is highly recommended prior to installing the 680 and 880 model anchors

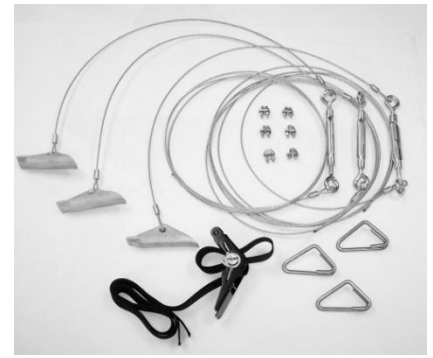


CONFIRM LOCATION OF ALL UNDERGROUND UTILITIES BEFORE INSTALLATION

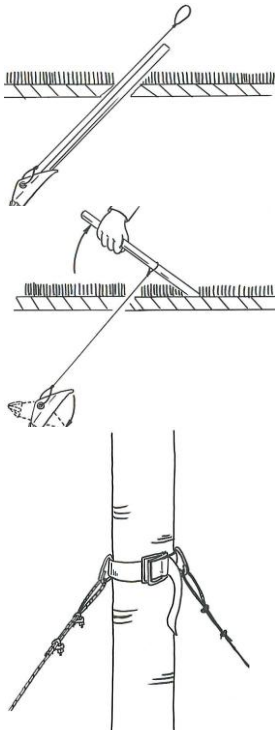

- 1.) Locate installation area approximately 4-6 feet from tree base. Insert drive rod into earth anchor. Using a heavy hammer, drive anchor into the ground, approximately 24 to 30 inches. Remove drive rod.
- 2.) Insert drive rod through exposed cable loop (kit #3A-EKPC400 requires winding exposed cable around drive rod). Place drive rod end against firm soil for leverage. Pry up on drive rod to "set" the anchor. Pull up until no additional movement is noticed. Anchor is "set" for maximum holding capacity when it is perpendicular to the securing cable.
- 3.) Attach ratchet strap around palm trunk, approximately 5-7 feet above ground level, with the ratchet strap securely in place, but not completely tight. Attach three (3) triangular palm clips onto palm strap at even intervals (approximately 120° apart). Tighten ratchet strap around palm trunk. Open turnbuckles completely. Insert wire rope end through palm clip around open corner. Pull wire rope taut, attach wire rope clamps around two (2) parallel wire ropes and secure with wrench until tight. Adjust turnbuckles to desired tension.

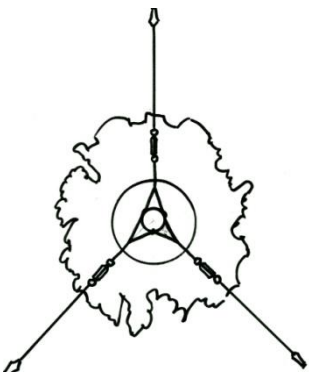

Verify your requirements prior to driving the anchor into the ground. Each anchor application may differ due to soil type, tree size and species, and location. Anchor holding capacity is dependent on soil type and density.



Better Bilt "Drive Rods" sold separately



Better Bilt Products, Inc.

For more information contact: **Sales / Better Bilt Products**

800.544.4550 / 630.543.6767

Fax: 630.543.0524

bbponline.com

Purchase our products online at: cartsnanchors.com