


Better Bilt Speed Stake® Installation Instructions

Item # 3A-SS


Required items:

Speed Stake®; Speed Stake® Driving Tool (available from Better Bilt Products)


Guying Strap (Soft Strap guying strap available from Better Bilt Products)

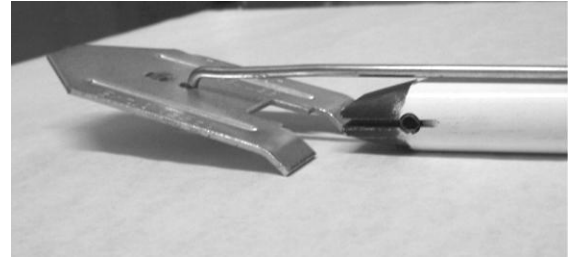


Installation Tool (Item # 3A-SST)

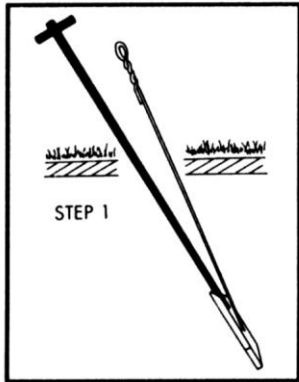

STEP 1

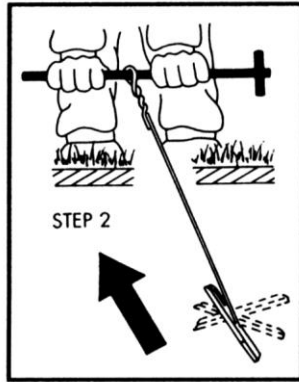


STEP 2

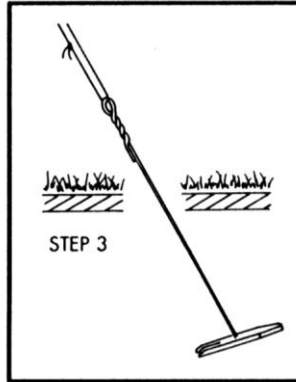


STEP 3

***Note:** Drive the Speed Stake® into the ground at an angle that allows a straight line to be created between the base of the anchor and the tree trunk tie-off point.

Lock the Speed Stake® into the driving tool. Drive into the soil at an angle*, pointing the anchor shaft where you want to tie off to the tree. Remove tool and slip tool through anchor eyelet and pull upwards until no movement is felt. Tie off the guying strap to the tree. Tie the opposite end of the guying strap to the Speed Stake® eyelet using the Speed Stake® Knot (as shown below). If the tree ball settles, loosen the Speed Stake® knot, take up the slack and retighten the Speed Stake® knot. No turnbuckle, hose or wire to worry about. Removal is easy. Clip wire below ground level. Fold cut end over on itself with pliers leaving no sharp ends.

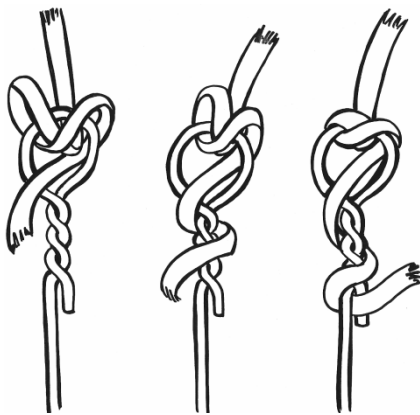

Speed Stake® Knot

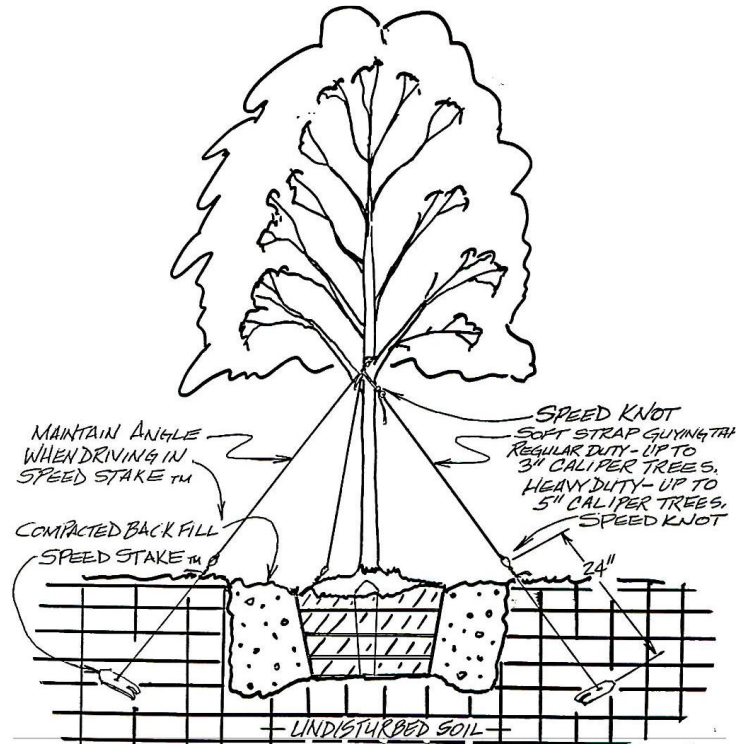

Better Bilt Products, Inc.

For more information contact: Sales / Better Bilt Products

800.544.4550 / 630.543.6767

Fax: 630.543.0524

bbponline.com

Purchase our products online at: cartsnanchors.com